



# Category Fiber Optics NID




## Fiber Optics Termination Box

Our Fiber Optic Termination Boxes are environmentally sealed units that provide the point of demarcation between the indoor and outdoor cable segment of the customer’s environment before access to the ONT in FTTH application. This NID box comes complete with 164 feet of pre-terminated rugged outdoor fiber optic cable on a removable reel. The fiber is pre-terminated with two SC/APC factory installed connectors. In a typical installation, the technician reels out the needed amount of fiber and then leaves the remaining on the removable reel. If needed, the technician can cut the leading installed end to get through tight spaces and then install a field installable or spliced on connector to complete the install. Also comes with mounting screws and two SC/APC adaptors.

### Part Number

FOTB-NID-LG-50M2xSC

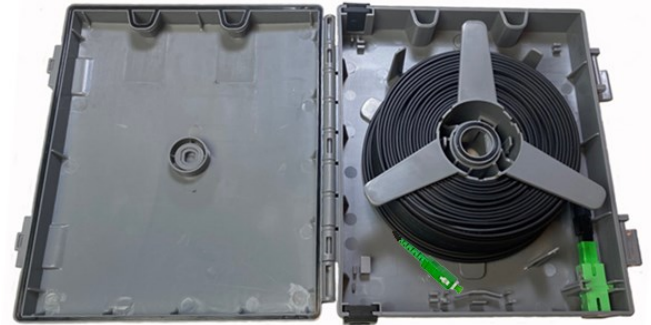

## Specifications

Box Dimensions	A = 200mm (7.9") B = 180mm (7.1") C = 48mm (1.9")
Style	Hinged top with locking tabs
Body	Plastic (ABS)
Color	Grey
Thickness	2.0 - 2.8mm
Fiber entry ports	2 outdoor drops, 2 SC adaptors
Installation	Outdoor wall mount
Environmental Level	IP 65
Operation temperature	-40 - +85C
Fiber Length	50m (164 ‘)
Fiber Jacketing	LSZH Flat jacket , dual side armored
Fiber Core	Single
Micro bending loss	1 turn x 10mm radius @1550nm = ≤0.75dB
Color	Black
Connectors	SC/APC (both ends)

