



Ordering link

Optical Attenuators




Optical Adaptors **JKAT In-line Series**

Our **JKAT's** are high quality compact optical attenuators. These feed-thru, male to female style attenuators are available in SC, FC and LC connector types. Values are 01 to 10dB , 15dB, 20dB, 25dB, and 30dB.

Note: Every JKAT is tested for tolerance and inspected with an optical microscope before shipping.

Part Number Matrix

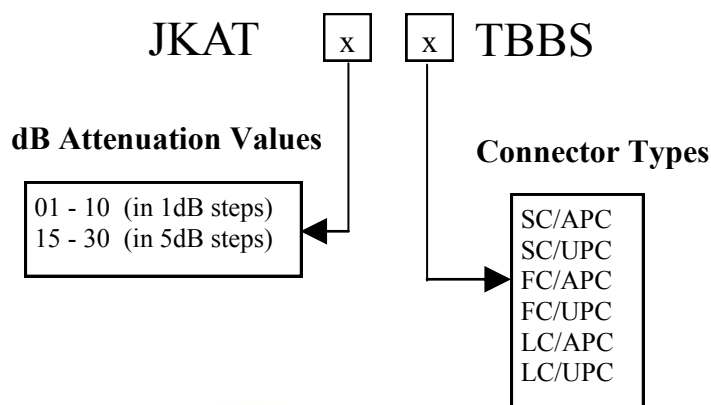

Specifications



Working Wavelength	1250 - 1620 nm
Attenuation Accuracy	1-5dB (+/- 0.1dB) 05-10dB (+/- 0.3dB) 10-30dB (+/- 0.5dB)
Max Power	1W
Operating Temperature	-25C - +70C
Return Loss	>/= 50dB (UPC) >/= 65dB (APC)

QR code for this Document