




Patch Cord / Jumper



Optical Patch Cord (OM2 Singlemode)

Part Number Matrix

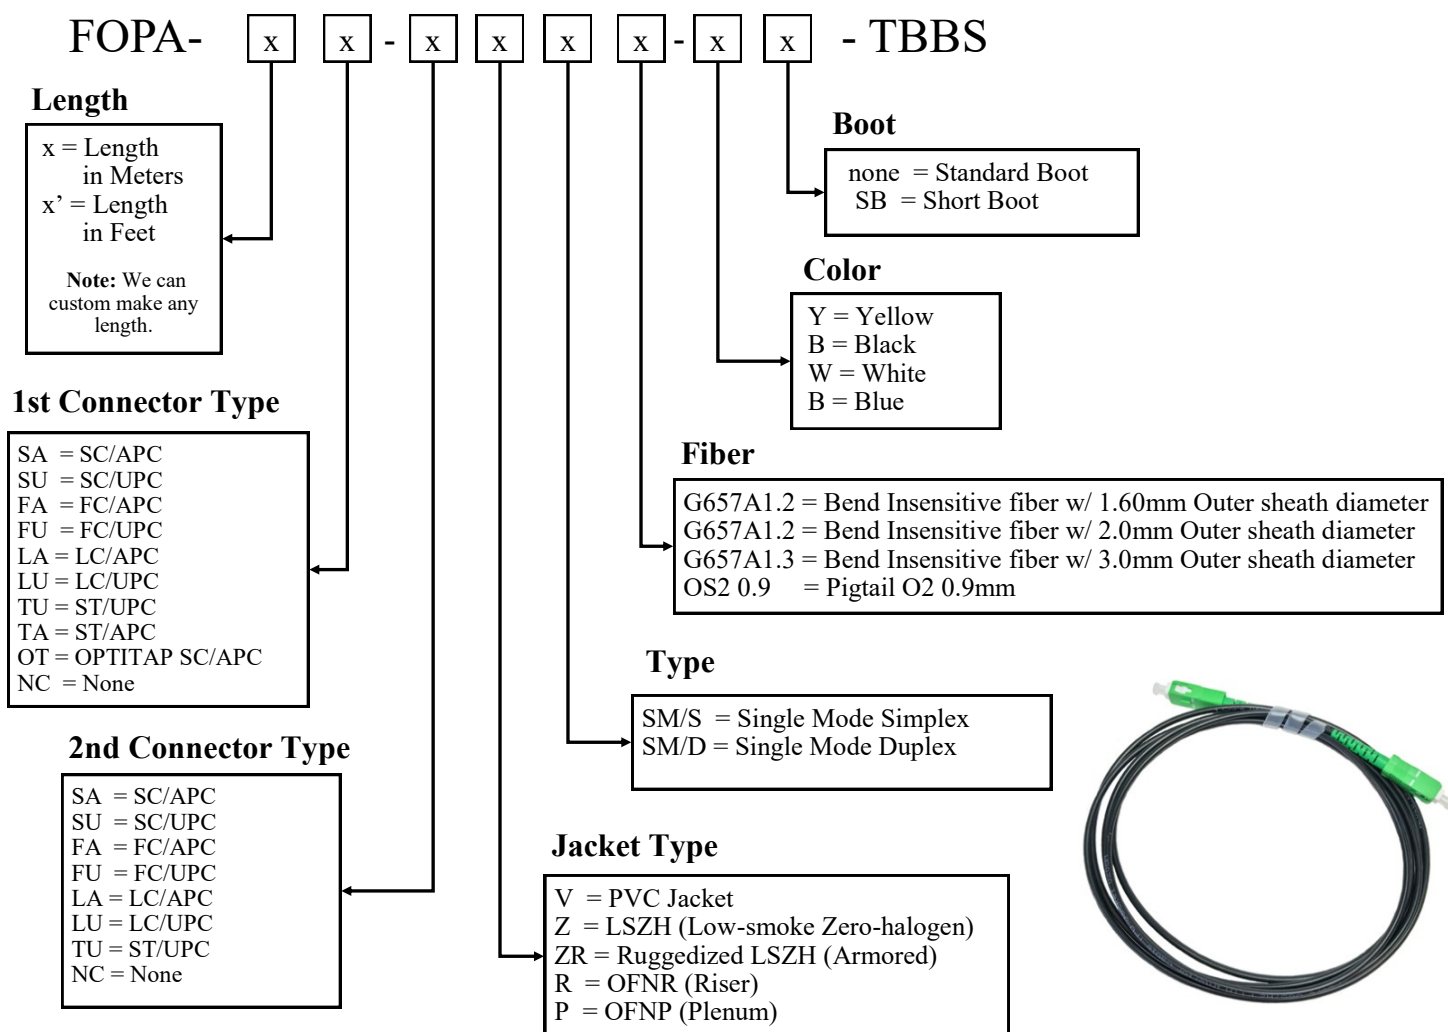

Specifications

Insertion Loss	<= 0.30dB (0.2dB standard)
Insert and Pull frequency	> 1000
Repeatability	<= 0.10dB
Operating Temperature	-20C - +60C
Return Loss	>= 50dB UPC >= 60dB APC

Jacket	PVC/LSZH/OFNP/OFNR
Construction	900 μ m Tight Buffer
Fiber Rating	G657.A
Ferrules	Ceramic
End Markings	Each end marked A//B