



Category Attenuators



In-Line Reverse Attenuators 5MHz to 1.8GHz

Our F-Style Reverse Attenuators (RAT) are high quality one piece, in-line attenuators that attenuate only the reverse band 5-85MHz and not the forward band 105MHz to 1.8GHz. They are presently available in values 3 - 21dB in three dB increments representing the attenuation from 5 to 85MHz.

Part Number Matrix

RAT - 85 - xx TBBS

Value in decibels

Values measured at 870MHz


xx = 3dB
 = 6dB
 = 9dB
 = 12dB
 = 15dB
 = 17dB
 = 19dB
 = 21dB

Specifications

Band Pass	5MHz - 1.8GHz
Band Pass Flatness	+/- 0.2dB (w/ respect to slope)
Return Loss	>-16dB min
RFI	125dB
Length	55mm (2.2 ")
Diameter	13mm (.5") (7/16")
Style	One piece
Body	Nickel plated brass housing




In-Line Reverse Attenuators 5MHz to 1.8GHz

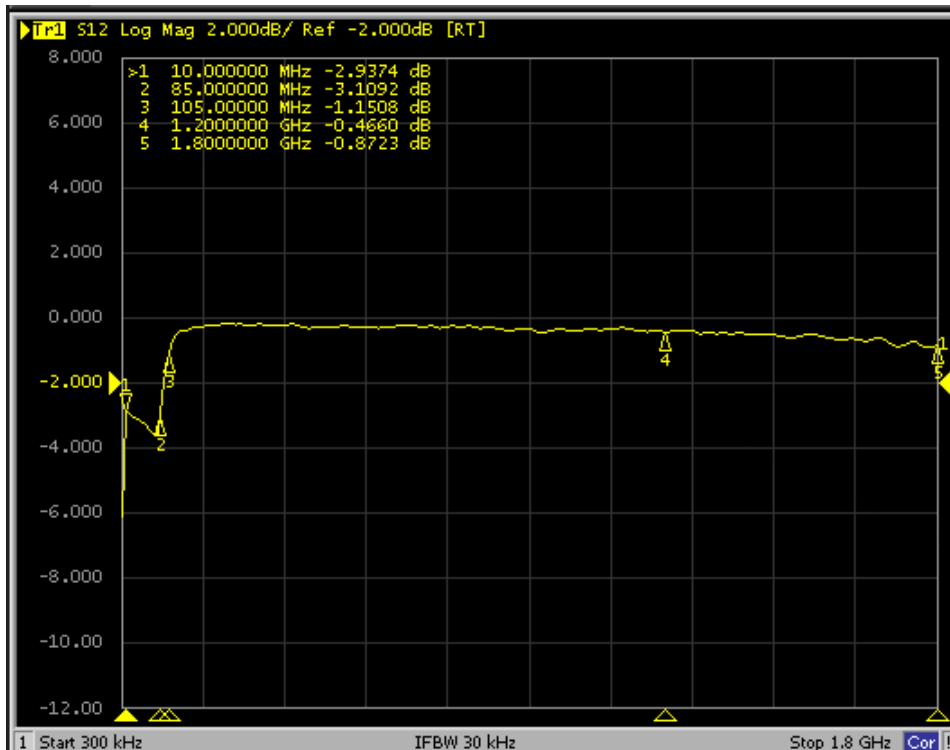

Forward Sweep


3 dB

Return Loss

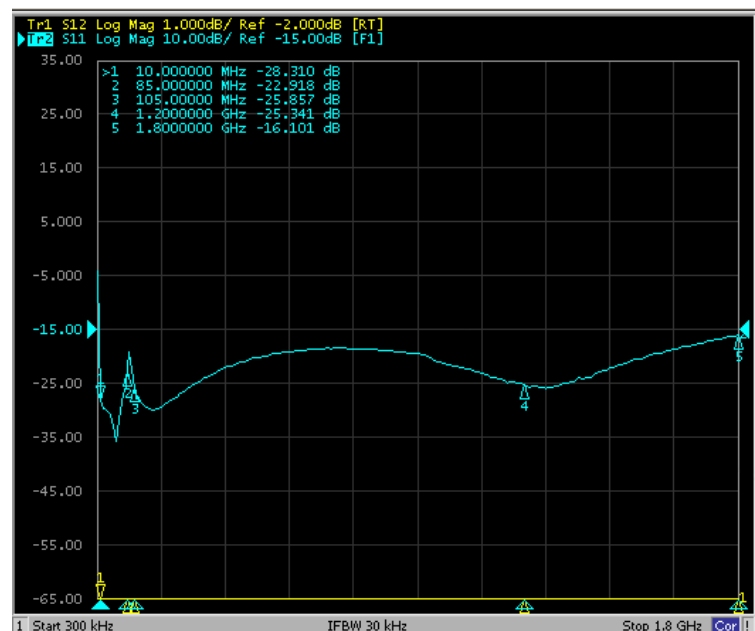




In-Line Reverse Attenuators 5MHz to 1.8GHz

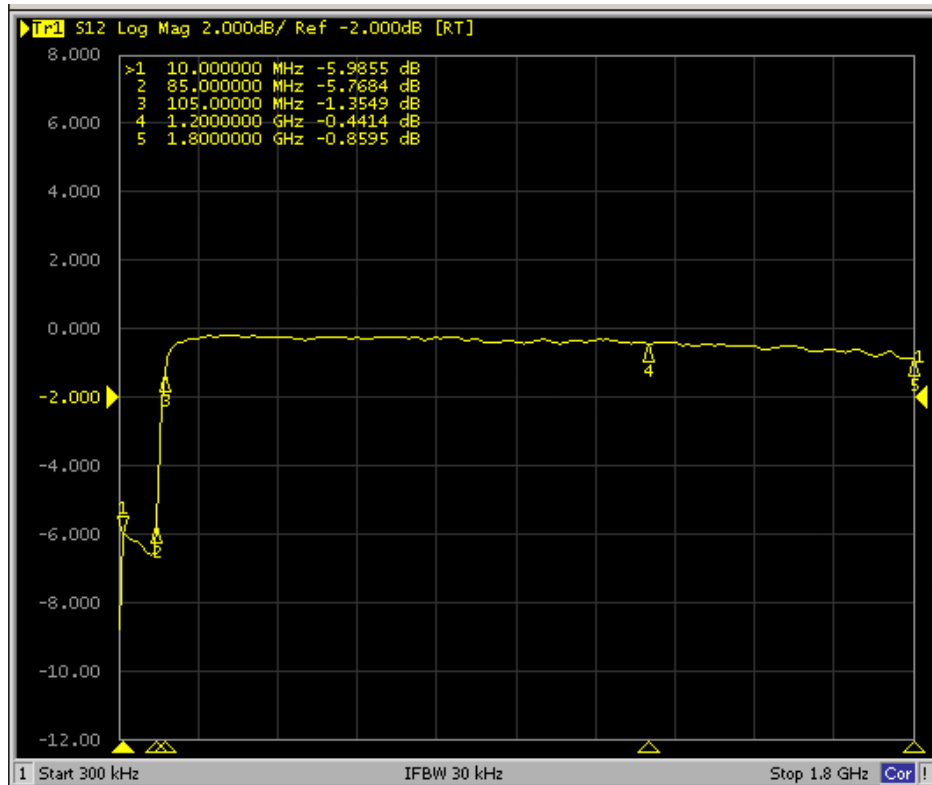

Forward Sweep


6 dB

Return Loss

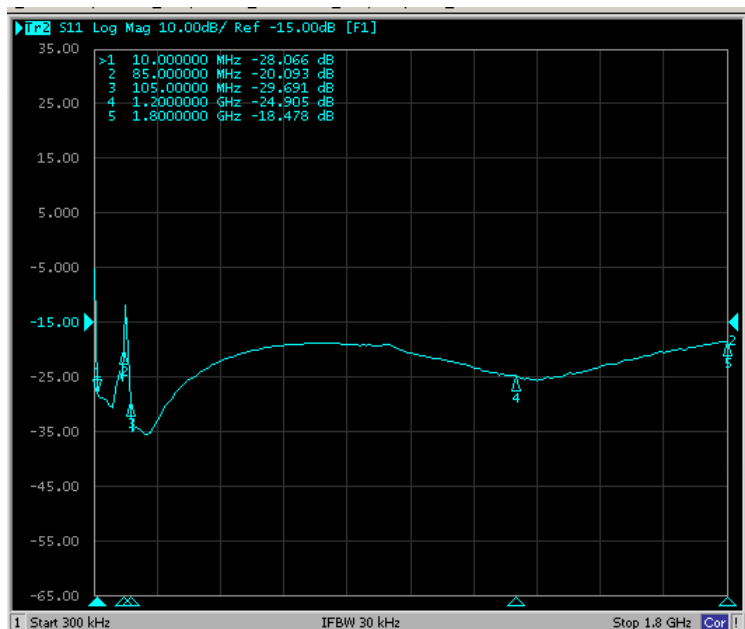




In-Line Reverse Attenuators 5MHz to 1.8GHz

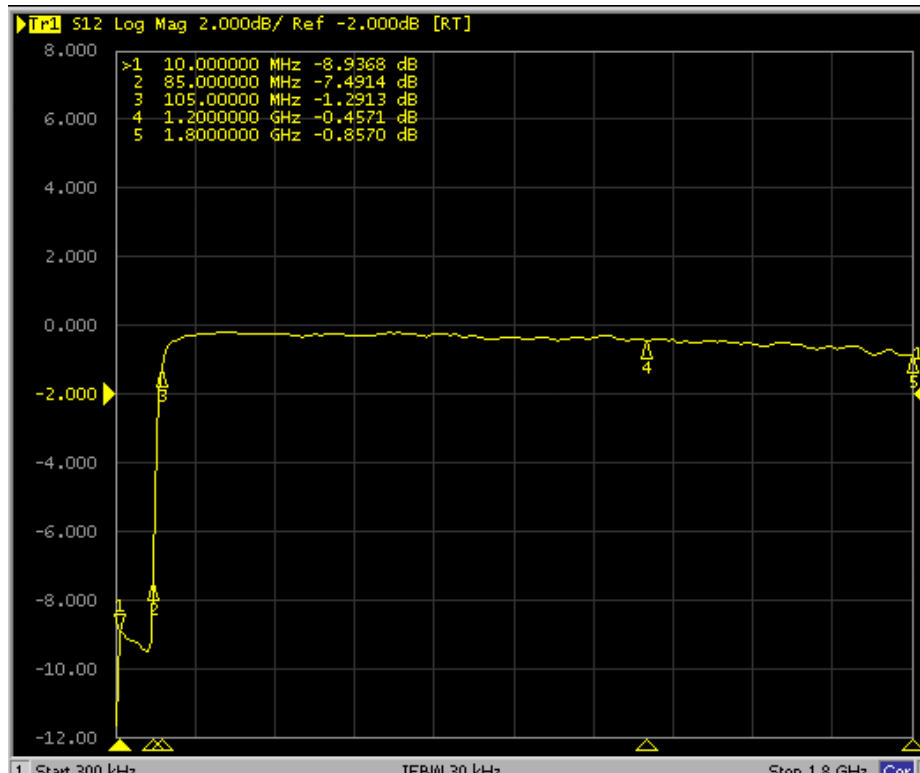


Forward Sweep


9 dB

Return Loss

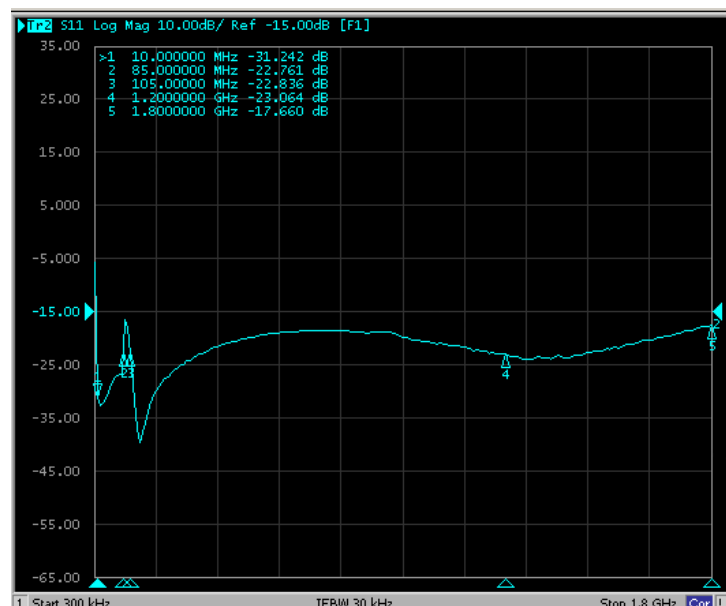




In-Line Reverse Attenuators 5MHz to 1.8GHz

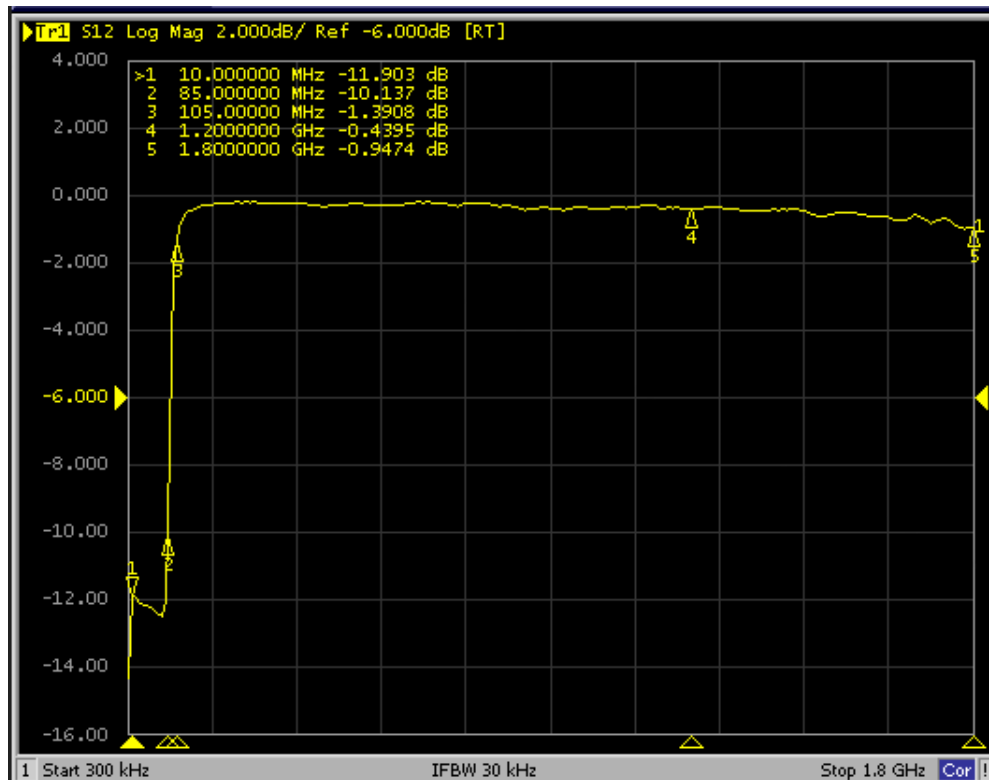

Forward Sweep


12 dB

Return Loss

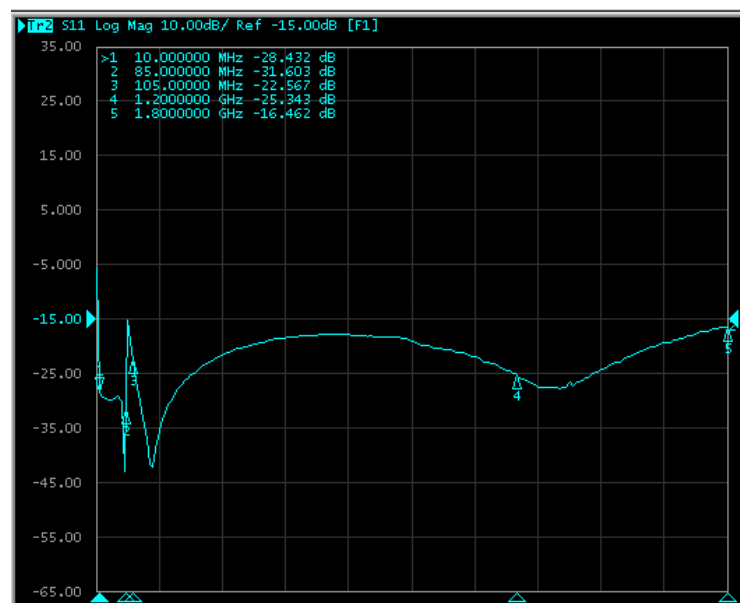




In-Line Reverse Attenuators 5MHz to 1.8GHz

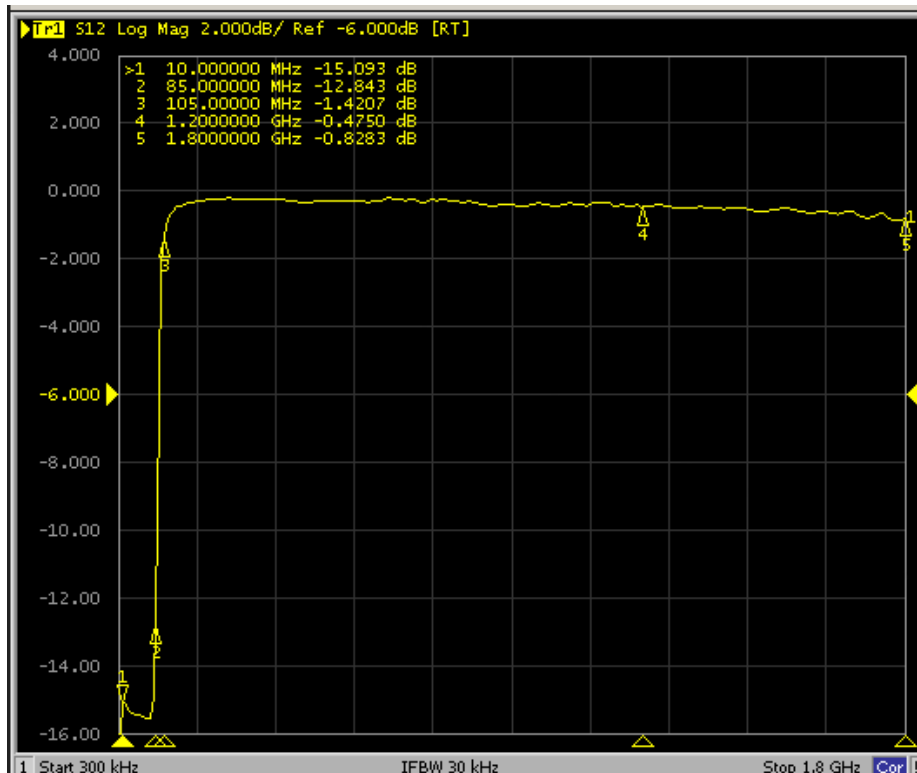

Forward Sweep


15 dB

Return Loss

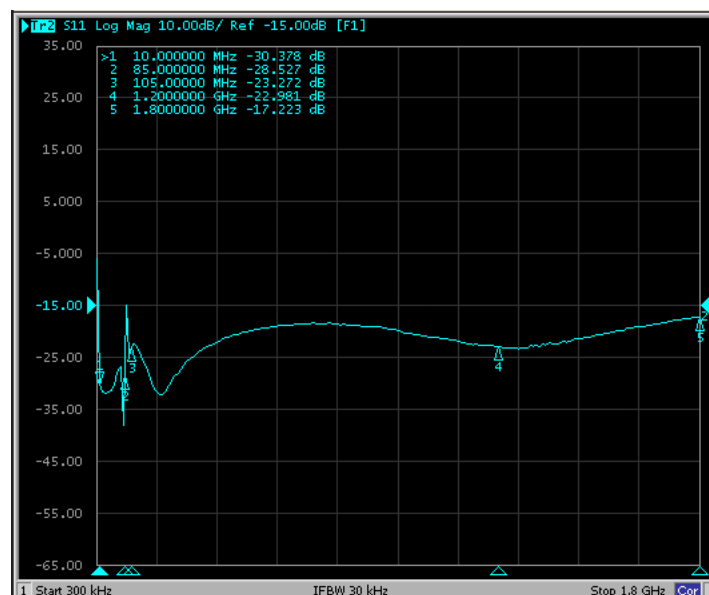




In-Line Reverse Attenuators 5MHz to 1.8GHz

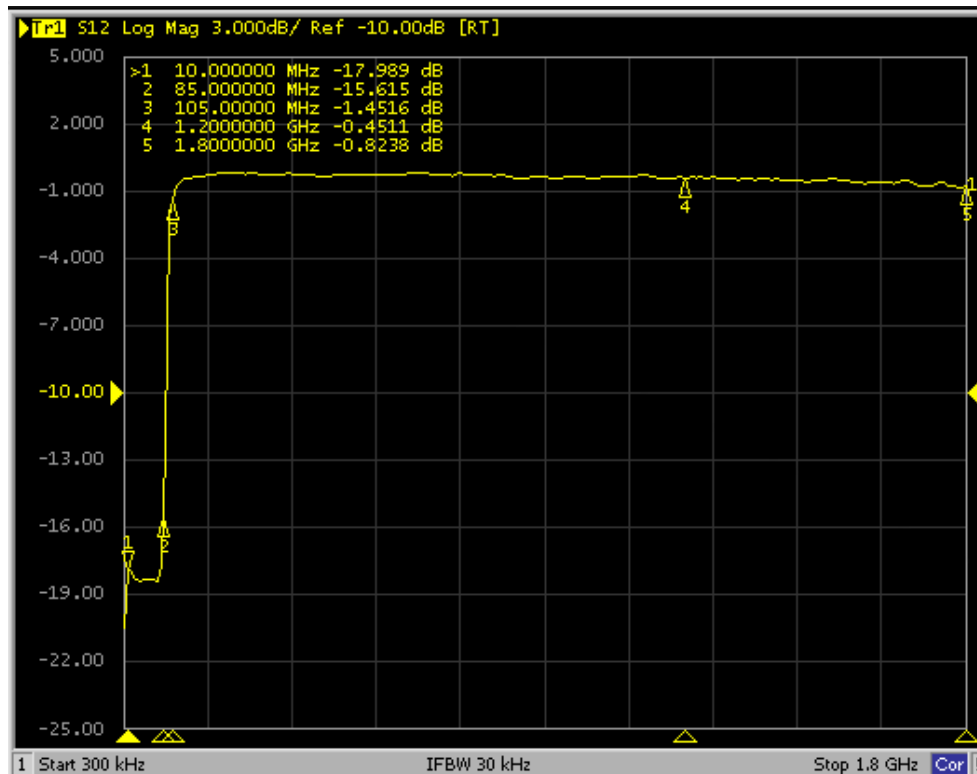


Forward Sweep


18 dB

Return Loss

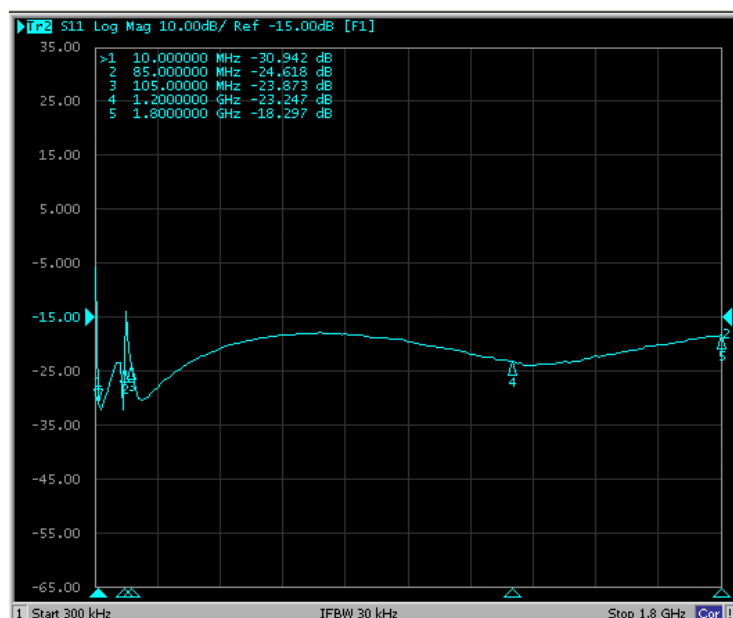



In-Line Reverse Attenuators 5MHz to 1.8GHz

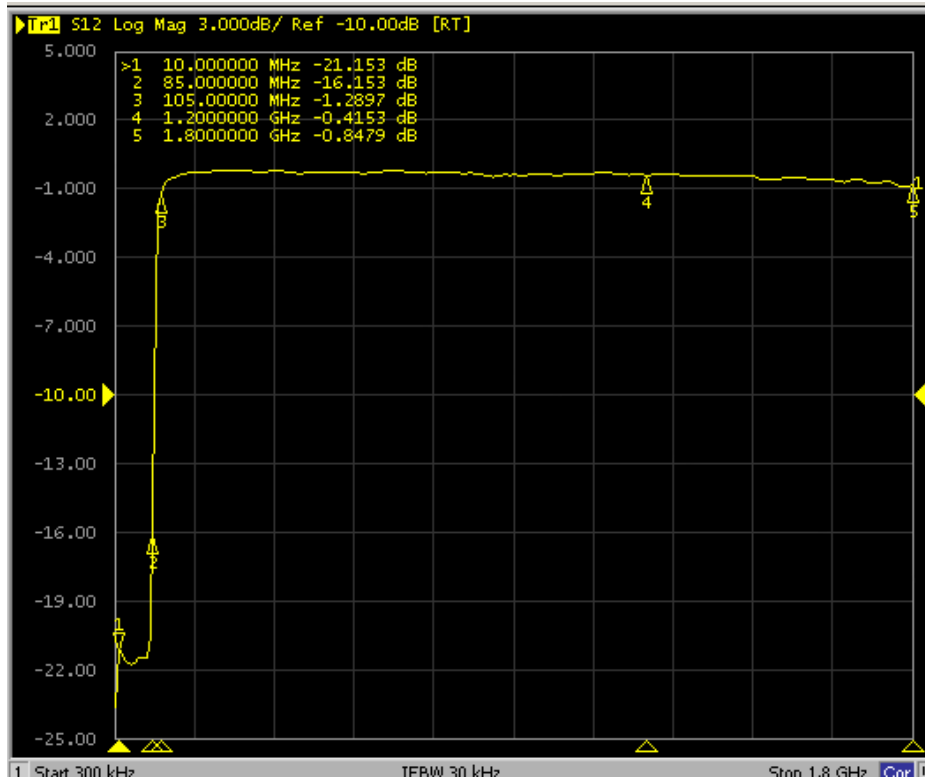

Forward Sweep

21 dB

Return Loss

